


# ELECTROMECHANICAL LOCKING DEVICE

# easyBLOCKER25

Art. No. 108325.0

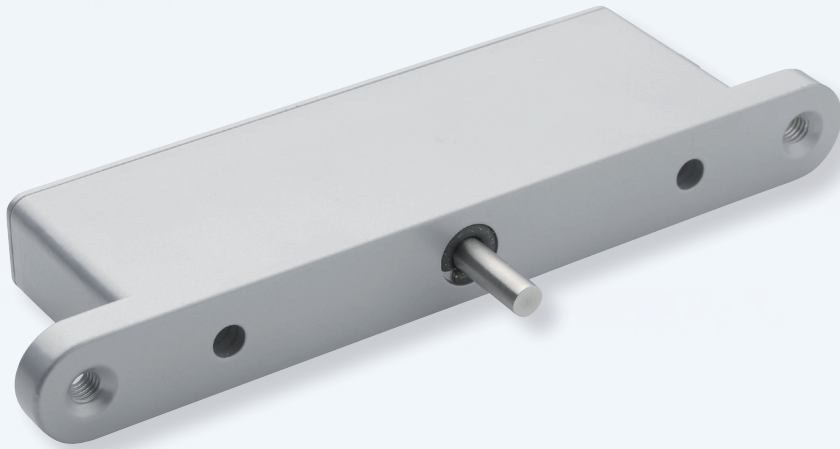

Robust, reliable and secure - our EasyBlocker25 for securing rolling gates, garages and slatted gates.

- » VdS-Classification C (G 196089)
- » Qualified for intrusion detection systems according to DIN EN 50131-1
- » 36 months warranty

The mechanical stability of the device stands out from comparable devices in the market place. The device is particularly used to secure gates to reach VdS-required inevitability of intrusion detection systems.

EasyBlocker25 can be used whenever high mechanical stability is required. Some of the main features are massive fixing flanges and a 8 mm stainless steel locking bolt with hard metal plain bearings.

Especially in logistics and transport the device is widely accepted.

## Product details:

- |                                                      |                                                       |
|------------------------------------------------------|-------------------------------------------------------|
| » Power supply voltage: 8 to 15 V DC                 | » Feedback of bolt position                           |
| » Power consumption at rest:<br>approx. 5 mA         | » Housing dimensions (L x W x D):<br>170 x 26 x 61 mm |
| » Power consumption when closing:<br>approx. 80 mA   | » Flange dimensions (L x D):<br>220 x 10 mm           |
| » Power consumption when blocking:<br>approx. 160 mA | » Fixing thread: M8                                   |
| » Locking bolt diameter: 8 mm                        | » Cable length: 3,5m                                  |
| » Locking bolt length: 25 mm                         | » Operating temperature: -25°C to +60°C               |
|                                                      | » VdS-Environment-Class: III                          |

**bss**  
Security  
through Innovation



GEBÄUDE & OBJEKTE



ANLAGEN & MASCHINEN



TRANSPORT & WERTBEHÄLTNISSE



PARTNERING WITH:

**SIEMENS ABB**

UTC Fire & Security

GIRA

ABI

**B.**  
Berker

# ELECTROMECHANICAL LOCKING DEVICE

# easyBLOCKER25

Art. No.108325.0



108325.U



108325.W

## Accessories:

- » 108325.U - Aluminium spacer for mounting bracket, 5 mm
- » 108325.W - Universal mounting bracket, stainless steel, 3 mm

FACILITIES - MACHINERY & PLANTS - TRANSPORT & SECURE STORAGE

BSS Baumann  
Sicherheitssysteme GmbH  
Stockacher Straße 30  
78315 Radolfzell, Germany

Tel.: +49 (0) 7732 98279-0  
Fax: +49 (0) 7732 98279-10  
www.bss-sdi.com  
info@bss-sdi.com



Technical modifications and errors excepted

**bss**  
Security  
through Innovation



PARTNERING WITH:

**SIEMENS ABB**

UTC Fire & Security

GIRA

ABI

**B.**  
Berker