


BOLT SWITCHING CONTACT rkSMART II

Art. No. 404055.0

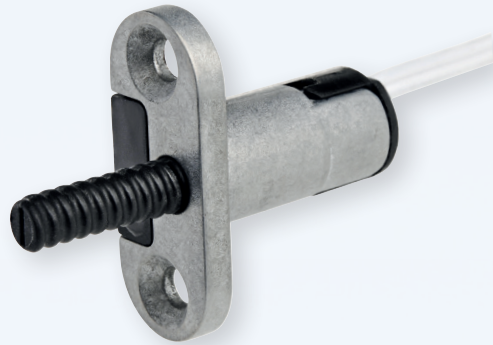

Bolt Switching Contact RK-Smart II is famous for its small installation dimensions. It is used for monitoring doors, windows and cabinets.

- » VdS-Classification C (G 116082)
- » Qualified for intrusion detection systems according to DIN EN 50131-1
- » 36 months warranty

RK-Smart II demonstrates extreme robustness. The bolt switching contact is installed in door frames, windows or cabinets. RK-Smart II can easily be installed by means of a simple drilling hole. Even after installation of RK-Smart II, it is easy to re-adjust the switching point. No additional part or tools are required. The bolt of RK-Smart II can be turned in or out depending on the requirements on-site. Time and cost consuming removal and re-installation is not required.

Product details:

- | | |
|--|---|
| » Housing (ø x L): 9.9 x 19 mm | » Resistance: max. 200 mOhm |
| » Flange (B x L): 11.5 x 27.5 mm | » Cable: 2 x 0,14 mm ² |
| » Bolt (ø x L): 4.5 x 13.9 mm | » Cable length: 6.0 m |
| » Max. Bolt throw: 13.9 mm | » Housing material: Zinc diecast, grey |
| » Switching point: Reached after 1.5 to 3 mm | » Operating temperature:
-40° C bis +70° C |
| » Type: Closed when operated | » Protection: IP 67 |
| » Load bearing capacity: max. 30 V, 0.3 A | |

bss
Security
through Innovation



GEBÄUDE & OBJEKTE



ANLAGEN & MASCHINEN



TRANSPORT & WERTBEHÄLTNISSE



PARTNERING WITH:

SIEMENS ABB

UTC Fire & Security

GIRA

ABI

B.
Berker

BOLT SWITCHING CONTACT
rkSMART II

Art. No. 404055.0



FACILITIES - MACHINERY & PLANTS - TRANSPORT & SECURE STORAGE

BSS Baumann
Sicherheitssysteme GmbH
Stockacher Straße 30
78315 Radolfzell, Germany

Tel.: +49 (0) 7732 98279-0
Fax: +49 (0) 7732 98279-10
www.bss-sdi.com
info@bss-sdi.com



Technical modifications and errors excepted



PARTNERING WITH:

SIEMENS ABB

UTC Fire & Security

GIRA

ABI

B.
Berker